

SB-3715

1x4 Scart Distribution Amplifier

SCART AUDIO AMPLIFIER

Input : 1x Scart
Output : 4x Scart


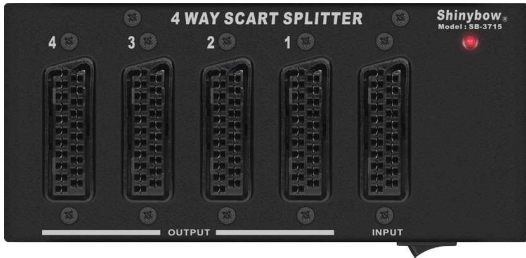


DIAGRAM TYPICAL

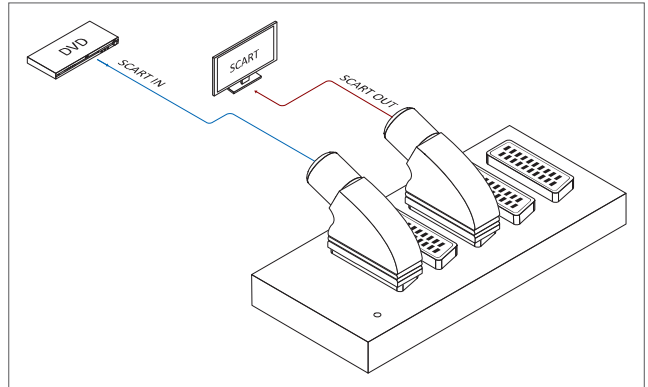

FEATURES

- Support SCART 1 input To 4 Outputs Routing Switcher
- Input: 1x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Outputs: 4x SCART (RGB, S-Video, Composite Video and Stereo Audio)
- SCART Group input/output Signals included
 - RGB
 - S-Video (Y/C)
 - Composite Video
 - Audio: Stereo Audio (AR, AL)
- Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
- Auto Scan 16:9 and 4:3 Screen Line vision
- Power on status with LED display on power switch
- Power Supply for 100~230VAC, 12VDC Universal Type switch

SPECIFICATIONS

Type of Switcher	1 in To 4 out SCART Routing Switcher
Type of Signal	SCART (RGB, S-Video, Composite Video and Stereo Audio)
Video Bandwidth	110 MHz, -3dB (G=+2)
High Speed and fast settling	on 5V
HDTV	480i, 480p, 576p, 720p, 1080i, 1080p
Low Power	4.4 mA/Amplifier
Scan Rates Accepted	50Hz or 60Hz
Monitor screen	Auto Scan 16:9 or 4:3
Lower power consumed	consumed full load under 650/400Ma
Controls	power switch with LED readout
Safety approvals	CE, FCC
Dimension (WxDxH)	6.88" x 3.14" x 0.98" (175mm x 80mm x 25mm)
Weight	0.7 kg / 1.54 lb
Power Supply	DC 12V, @1A (World Wide Universal AC 100~240V 50/60Hz)

SB-3720

1x8 Scart Distribution Amplifier

SCART AUDIO AMPLIFIER

Input : 1x Scart
Output : 8x Scart


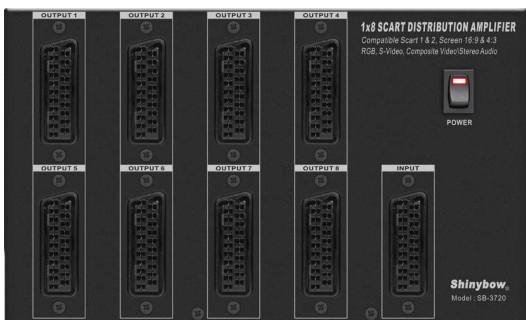


DIAGRAM TYPICAL

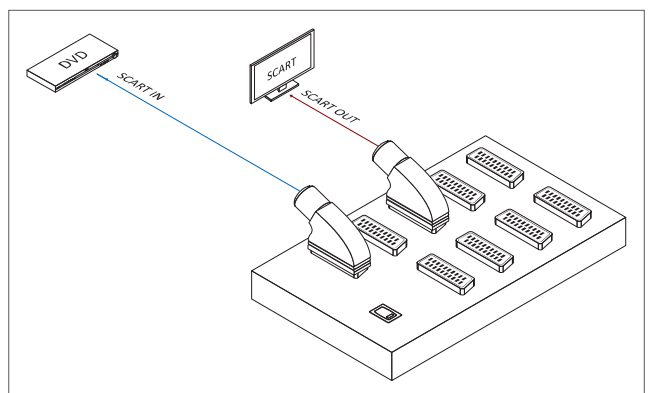

FEATURES

- Support SCART 1 input To 8 Outputs Routing Switcher
- Input : 1x SCART (RGB, S-Video, Composite Video and Stereo Audio)
Outputs: 8x SCART (RGB, S-Video, Composite Video and Stereo Audio)
- SCART Group input/output Signals included
 - RGB
 - S-Video (Y/C)
 - Composite Video
 - Audio: Stereo Audio (AR, AL)
- Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
- Auto Scan 16:9 and 4:3 Screen Line vision
- Power on status with LED display on power switch
- Power Supply for 100~230VAC, 12VDC Universal Type switch

SPECIFICATIONS

Type of Switcher	1 in To 8 out SCART Routing Switcher
Type of Signal	SCART (RGB, S-Video, Composite Video and Stereo Audio)
Video Bandwidth	110 MHz, -3dB (G=+2)
High Speed and fast settling	on 5V
HDTV	480i, 480p, 576p, 720p, 1080i, 1080p
Low Power	4.4 mA/Amplifier
Scan Rates Accepted	50Hz or 60Hz
Monitor screen	Auto Scan 16:9 or 4:3
Lower power consumed	consumed full load under 650/400mA
Controls	power switch with LED readout
Safety approvals	CE, FCC
Dimension (WxDxH)	9.44" x 5.70" x 1.06" (240mm x 145mm x 27mm)
Weight	0.8 kg / 1.76 lb
Power Supply	DC 12V, @1A (World Wide Universal AC 100~240V 50/60Hz)