

SB-3706SV

1x8 S-Video Distribution Amplifier

Input : 1x S-Video
Output : 8x S-Video


S-VIDEO DISTRIBUTOR



INTRODUCTION

SB-3706SV is a 1 input to 8 outputs S-Video(Y/C) Distribution Amplifier. The Video Bandwidth 80MHz Amplifier product. It's one of the most innovative signal S-Video via Mini-din female connector Distribution Amplifier product on the market today. Support wall rack mount type. It has 1 individual input with 8 individual outputs. Because it is a 1 to 8 signal Distributor, any input may be routed to outputs. It completely eliminates the need to constantly move around S-Video input and output cables. This Distribution Amplifier is ideally suited for TV for the resolution of 480p, 720p.

DIAGRAM TYPICAL

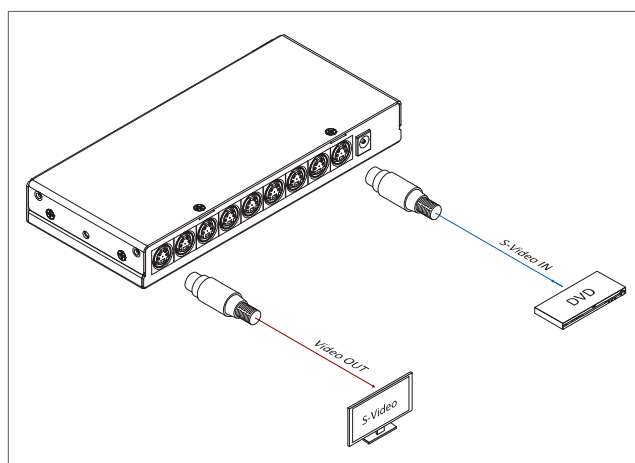

FEATURES

01. Support 1x8 S-Video (Y/C) Distribution Amplifier
02. Signals amplifier including : S-Video (Y/C)
03. Terminator via Mini-Din 4 pin Female Connector
04. Support HDTV Resolution for 480i, 480p, 576p, 720p
05. Video Bandwidth : 80MHz (-3dB), 200 mVp-p
06. Scan Rates Accepted for 50Hz or 60Hz
07. Support Lower power consumed full load under 210 mA
08. Power supply offer a universal type 100~240 VAC switch

SPECIFICATIONS

Type of switcher	1 input to 8 outputs S-Video Distribution Amplifier
Type of Signals	S-Video (Y/C)
Video Bandwidth	80MHz, (-3dB) 2V p-p
Slew Rate	1000V/us, Fixed internal gain of 2
Scan Rates Accepted	50Hz or 60Hz
Safety Approvals	CE, FCC, VCCI, Erp, WEEE
Dimension (WxDxH)	6.88" x 3.14" x 0.98" (175mm x 80mm x 25mm)
Weight	0.7 kg / 1.54 lb
Power Supply	DC 12V, @0.3A (World Wide Universal AC 100~240V 50/60Hz)