


## SB-3715


1x4 Scart Distribution Amplifier

SCART AUDIO AMPLIFIER

Input : 1x Scart  
Output : 4x Scart

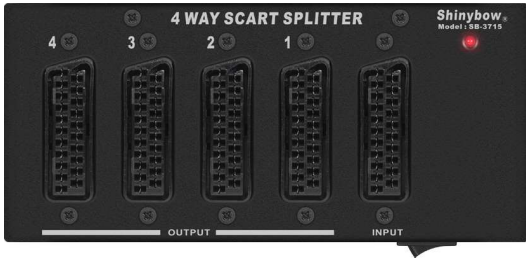

### DIAGRAM TYPICAL

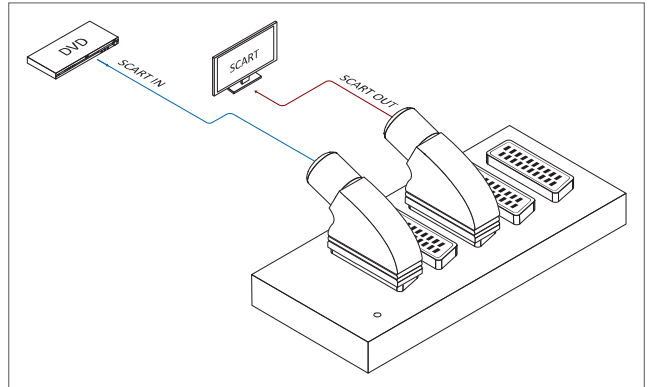

### FEATURES

01. Support SCART 1 input To 4 Outputs Routing Switcher
02. Input: 1x SCART (RGB, S-Video, Composite Video and Stereo Audio)  
Outputs: 4x SCART (RGB, S-Video, Composite Video and Stereo Audio)
03. SCART Group input/output Signals included
  - RGB
  - S-Video (Y/C)
  - Composite Video
  - Audio: Stereo Audio (AR, AL)
04. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
05. Auto Scan 16:9 and 4:3 Screen Line vision
06. Power on status with LED display on power switch
07. Power Supply for 100~230VAC, 12VDC Universal Type switch

### SPECIFICATIONS


Type of Switcher	1 in To 4 out SCART Routing Switcher
Type of Signal	SCART (RGB, S-Video, Composite Video and Stereo Audio)
Video Bandwidth	110 MHz, -3dB (G=+2)
High Speed and fast settling	on 5V
HDTV	480i, 480p, 576p, 720p, 1080i, 1080p
Low Power	4.4 mA/Amplifier
Scan Rates Accepted	50Hz or 60Hz
Monitor screen	Auto Scan 16:9 or 4:3
Lower power consumed	consumed full load under 650/400Ma
Controls	power switch with LED readout
Safety approvals	CE, FCC
Dimension (WxDxH)	6.88" x 3.14" x 0.98" (175mm x 80mm x 25mm)
Weight	0.7 kg / 1.54 lb
Power Supply	DC 12V, @1A (World Wide Universal AC 100~240V 50/60Hz)

## SB-3720


1x8 Scart Distribution Amplifier

SCART AUDIO AMPLIFIER

Input : 1x Scart  
Output : 8x Scart

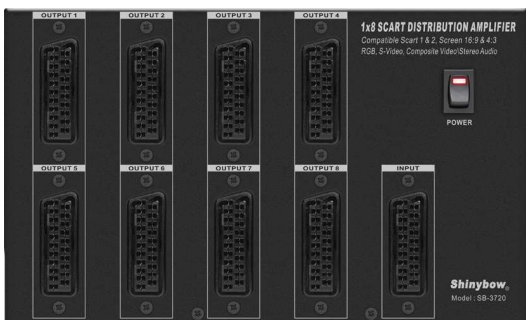

### DIAGRAM TYPICAL

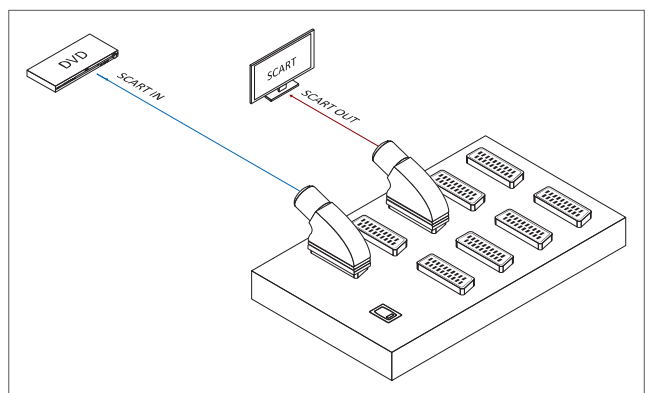

### FEATURES

01. Support SCART 1 input To 8 Outputs Routing Switcher
02. Input : 1x SCART (RGB, S-Video, Composite Video and Stereo Audio)  
Outputs: 8x SCART (RGB, S-Video, Composite Video and Stereo Audio)
03. SCART Group input/output Signals included
  - RGB
  - S-Video (Y/C)
  - Composite Video
  - Audio: Stereo Audio (AR, AL)
04. Refresh: for HDTV 480i, 480p, 576p, 720p, 1080i, 1080p
05. Auto Scan 16:9 and 4:3 Screen Line vision
06. Power on status with LED display on power switch
07. Power Supply for 100~230VAC, 12VDC Universal Type switch

### SPECIFICATIONS

Type of Switcher	1 in To 8 out SCART Routing Switcher
Type of Signal	SCART (RGB, S-Video, Composite Video and Stereo Audio)
Video Bandwidth	110 MHz, -3dB (G=+2)
High Speed and fast settling	on 5V
HDTV	480i, 480p, 576p, 720p, 1080i, 1080p
Low Power	4.4 mA/Amplifier
Scan Rates Accepted	50Hz or 60Hz
Monitor screen	Auto Scan 16:9 or 4:3
Lower power consumed	consumed full load under 650/400mA
Controls	power switch with LED readout
Safety approvals	CE, FCC
Dimension (WxDxH)	9.44" x 5.70" x 1.06" (240mm x 145mm x 27mm)
Weight	0.8 kg / 1.76 lb
Power Supply	DC 12V, @1A (World Wide Universal AC 100~240V 50/60Hz)