


SB-8188TB

8x8 VGA-Audio Matrix Switcher

Input : 8x VGA (RGBHV) / Stereo Audio (Terminal Block 5-pins sockets)
 Output : 8x VGA (RGBHV) / Stereo Audio (Terminal Block 5-pins sockets)


VGA | AUDIO | MATRIX | RS-232 | PRO
 Terminal Block | BALANCE | VOLUME

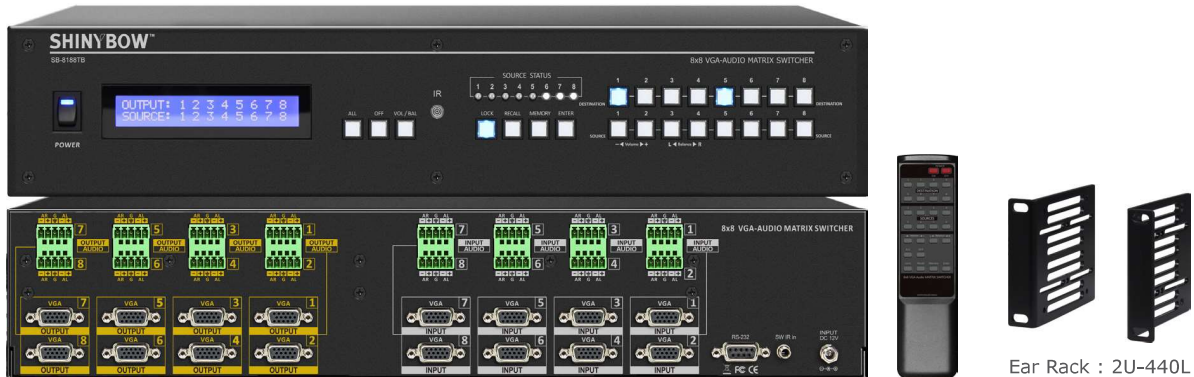

INTRODUCTION

SB-8188TB is a true (8) in To (8) out Matrix Switcher with high speed Video Bandwidth 425MHz, Maximum 450MHz, Audio Bandwidth 60MHz. Support signals for VGA and Audio product. It is an (8) individual VGA & Stereo Audio(AR/AL) inputs with (8) individual VGA(RGBHV) & Stereo Audio(use Terminal Block 5pins Female Sockets) outputs. Stereo Audio output support Volume(+0~+100 levels) and Balance (L=0~50 , R=51~100) control function. Support 19 inch Ear mount pair part number #2U-440L. It support (8) individual inputs with (8) individual outputs. Because it is a matrix routing switcher, any inputs may be routed to any output. It completely eliminates the need to constantly move around VGA or Audio input and output cables. This switcher is ideally suited for full HD High Definition LCD TV, HD Television or HD Monitor for VGA (R,B,G,H,V) signals or full HD Plasma display monitor resolution applications. Support world wide (6) button function control keys: 1.ALL, 2.OFF, 3.RECALL, 4.ENTER, 5.MEMORY, 6.LOCK. Control is provided Front panel push buttons, IR remote or RS-232. A RS-232 Windows GUI interface is provided for matrix routing control (Windows only).

DIAGRAM TYPICAL

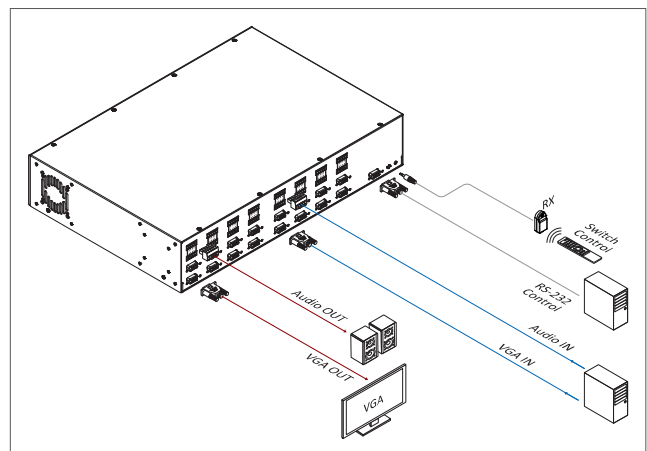

05

FEATURES

- Support (8) inputs to (8) outputs VGA & Audio Matrix Switcher
- Input signals via (8) analog VGA (RGBHV) and Stereo Audio (Terminal Block 5pin Sockets)
- Output signals via (8) analog VGA (RGBHV) and Stereo Audio (Terminal Block 5pin Sockets)
- Video Bandwidth 425MHz (-3dB), 200 mVp-p, maximum 450MHz, each path signals
- Audio Bandwidth 60MHz (Audio-Right = 60MHz, Audio-Left = 60MHz)
- Audio Frequency Response Range : 20Hz ~ 20KHz
- Stereo Audio output support Volume (+0~+100 levels) and Balance (L50~R50) control function
- Supported selection push buttons direct channel on front panel
- Support PC Resolution VGA (640x480), SVGA (800x600), XGA (1024x768), SXGA (1280x1024), UXGA (1600x1200), WUXGA (1920x1200)
- Low all hostile crosstalk of -83dB @ 5MHz
- Excellent ESD rating : exceeds 4000 V
- Various User Interface controls :
 - Windows based GUI control via RS-232 port
 - Front Panel push buttons
 - IR wireless remote controller
 - IR External port (Switch Control)
 - Third party RS-232 controller (via simple ASCII)
- Compatible with full HD high resolution Video player device and LCD/ Plasma monitor displays or Projector
- Direct selection and confirm via Front push buttons with LED readout
- Infrared : IR remote control (38KHz)
- Support world wide (6)x control function keys :
 - Front panel full controls : ALL / OFF / LOCK / RECALL / MEMORY / ENTER / VOL/BAL
- Support RS-232 interface control AP driver for PC 95/98/2000/xp
- A Windows-based control software Driver packaged
- Support desktop with Ear mount and 19 inch 2U Rack mountable type panel
- Support Lower power consumed full load under 1250 mA
- Power supply DC12Volt, Universal Type Switch 100~240VAC, 50/60Hz

SPECIFICATIONS

Type of VGA switcher	(8) inputs to (8) outputs VGA and Stereo Audio Matrix Switcher
Video Support	Analog VGA (75Ω), 1 Vp-p Output Signal (RGB) 0.7 Vp-p
Resolution supports	VGA, SVGA, XGA, SXGA, UXGA, WUXGA (1920x1200)
Video Bandwidth	VGA(RGBHV) : 425MHz, (-3dB) 200 mV p-p, 450MHz, (-3dB) 2V p-p, R=425MHz, G=425MHz, B=425MHz, H=110MHz, V=110MHz
Audio Frequency	Response range : 20Hz ~ 20KHz
Audio Bandwidth	60MHz, (Audio-Right = 60MHz, Audio-Left = 60MHz)
Input	(8)x Video (VGA-RGBHV) use D-sub HD15P connectors (8)x Audio (Stereo Audio) use Terminal Block 5pin Sockets
Output	(8)x Video (VGA-RGBHV) use D-sub HD15P connectors (8)x Audio (Stereo Audio) use Terminal Block 5pin Sockets
Audio Volume control	+0 ~ +100 levels (+6db)
Audio Balance control	L=+0 ~ +50, R=+51 ~ +100
Source Status	Input status LEDs indicates presence of a live signal
Gain Flatness	90MHz, 0.1dB
Differential Gain Error	0.01%, 0.1dB
Differential Phase Error	0.02, 0.1dB (RL=150W)
Fast settling time	15ns To 0.1%
All Hostile Crosstalk	-83dB @ 5MHz, -54dB @ 50MHz
Channel Crosstalk	-56dB @ 100MHz
Slew Rate	1000 V/us, G=+1,2 V Step
High OFF Isolation	-100dB@10MHz
Output Current	100 mA
Infrared Frequency	38KHz
IR External Distance	~984 feet / 300 meters maximum
Switch Controls	1x Select Function buttons on front panel (Data status via LCM panel show out) 1x IR Remote Controller (switch control) 1x IR External port (switch control) 1x RS-232 series interface (switch control)
Function key Control	ALL / OFF / LOCK / RECALL / MEMORY / ENTER / VOL/BAL, Destination button (1) thru (8), Source button (1) thru (8)
Chassis Material	Matal thin = 1 mm
Safety Approvals	CE, FCC, VCCI, REACH, Erp, WEEE
Rack Mount Bracket	19 inch 2U High Rack Mount Bracket (2U-440L)
Dimension (WxDxH)	17.4" x 11.9" x 3.46" (442mm x 303mm x 88mm)
Weight	4.7 kg / 10.36 lb
Power Supply	DC 12V, @3A (World Wide Universal AC 100~240V 50/60Hz)