

SB-8188CT

8x8 VGA-Audio Over CAT5 Matrix Switcher

Input : 8x VGA / Audio + 1 Preview port
Output : 8x CAT5 (VGA-Audio)


VGA AUDIO MATRIX CAT5 PRO



INTRODUCTION

SB-8188CT is a true (8) in To (8) out Matrix Switcher with high speed Video Bandwidth 425MHz, Maximum 450MHz, Audio Bandwidth 60MHz, for VGA (RGBHV) and Stereo Audio (AR/AL) signals product. It is an (8) individual VGA (RGBHV) & Stereo Audio (AR/AL) inputs with (8) individual CAT5 (VGA-RGBHV & Audio) outputs and 1x Preview output. The Preview output port is same picture with output #1 on the same time. Support 19 inch Ear mount pair part number #2U-440L. It support (8) individual inputs with (8) individual outputs. Because it is a matrix routing switcher, any input may be routed to any output. It completely eliminates the need to constantly move around VGA input and output cables. This switcher is ideally suited for full HD High Definition LCD HDTV Television for VGA (R,B,G,H,V) signals or HD Plasma display monitor resolution applications. Control is provided front panel push buttons, IR remote or RS-232. A RS-232 Windows GUI interface is provided for matrix routing control (Windows only).

DIAGRAM TYPICAL

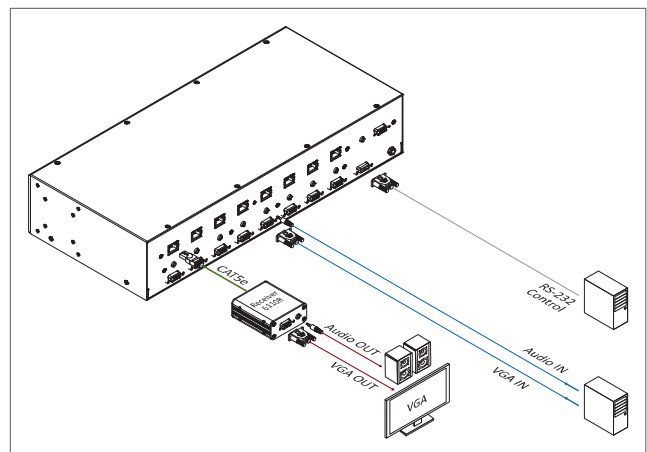

05

FEATURES

- Support (8) inputs to (8) outputs VGA & Audio Over CAT5 Matrix Switcher
- Input signals via (8) analog VGA (RGBHV) and Stereo Audio (3.5mm OD Jack)
- Output signals via one CAT5 category cable with VGA & Audio (RJ-45)
- Video Bandwidth 425MHz (-3dB), 200 mVp-p, maximum 450MHz, each path signals
- Audio Bandwidth 60MHz (Audio-Right = 60MHz, Audio-Left = 60MHz)
- Audio Frequency Respond 20Hz ~ 20KHz
- Supported selection push buttons direct channel on front panel
- Support PC Resolution VGA (640x480), SVGA (800x600), XGA (1024x768), SXGA (1280x1024), UXGA (1600x1200), WUXGA (1920x1200)
- Low all hostile crosstalk of -83dB @ 5MHz
- Excellent ESD rating : exceeds 4000 V
- Various User Interface controls :
 - Windows based GUI control via RS-232 port
 - Front Panel push buttons
 - IR wireless remote controller
 - IR External port (Switch Control)
 - Third party RS-232 controller (via simple ASCII)
- Compatible with full HD high resolution Video player device and LCD/ Plasma monitor displays or Projector
- Direct selection and confirm via front push buttons with LED readout
- Infrared : IR remote control (38KHz)
- Support RS-232 interface control AP driver for PC 95/98/2000/xp
- A Windows-based control software Driver packaged
- Support desktop with Ear mount and 19 inch 2U Rack mountable type panel
- Support Lower power consumed full load under 1650 mA
- Power supply DC12Volt, Universal Type Switch 100~240VAC, 50/60Hz

SPECIFICATIONS

Type of VGA switcher	(8) inputs to (8) outputs VGA OVER CAT5 Matrix Switcher
Video Support	Analog VGA (75Ω), 1 Vp-p Output Signal (RGB) 0.7 Vp-p
Resolution supports	VGA, SVGA, XGA, SXGA, UXGA, WUXGA (1920x1200)
Video Bandwidth	VGA(RGBHV) : 425MHz, (-3dB) 200 mV p-p, 450MHz, (-3dB) 2V p-p, R=425MHz, G=425MHz, B=425MHz, H=110MHz, V=110MHz
Audio Frequency	Response range : 20Hz ~ 20KHz
Audio Bandwidth	60MHz, (Audio-Right = 60MHz, Audio-Left = 60MHz)
Input	(8)x Video (VGA-RGBHV) use D-sub HD15P connectors (8)x Audio (Stereo Audio) use 3.5mm OD Jacks
Output	(8)x CAT5 (VGA & Audio) use RJ-45 8P8C Female Sockets
Preview Output	(1)x VGA (RGBHV) and Audio (Stereo Audio) signals
Source Status	Input status LEDs indicates presence of a live signal
Gain Flatness	90MHz, 0.1dB
Differential Gain Error	0.01%, 0.1dB
Differential Phase Error	0.02, 0.1dB (RL=150W)
Fast settling time	15ns To 0.1%
All Hostile Crosstalk	-83dB @ 5MHz, -54dB @ 50MHz
Channel Crosstalk	-56dB @ 100MHz
Slew Rate	1000 V/us, G=+1,2 V Step
High OFF Isolation	-100dB@10MHz
Output Current	100 mA
Infrared Frequency	38KHz
IR External Distance	~984 feet / 300 meters maximum
Switch Controls	1x Select Function buttons on front panel (Data status via LCM panel show out) 1x IR Remote Controller (switch control) 1x IR External port (switch control) 1x RS-232 series interface (switch control)
Chassis Material	Matal thin = 1 mm
Safety Approvals	CE, FCC, VCCI, Erp, WEEE
Rack Mount Bracket	19 inch 2U High Rack Mount Bracket (2U-440L)
Dimension (WxDxH)	17.4" x 11.9" x 3.46" (442mm x 303mm x 88mm)
Weight	4.7 kg / 10.36 lb
Power Supply	DC 12V, @3A (World Wide Universal AC 100~240V 50/60Hz)